Chickamauga Lock Dewatering
20 July – 16 August 2010

Basic set up for the dewatering

50

US Army Corps of Engineers
2

VICON

VICON

CUSTOM CAGE
M 332

MAX.
CAP.
1200

TEREX
100

100
TEREX
JLG LIFT

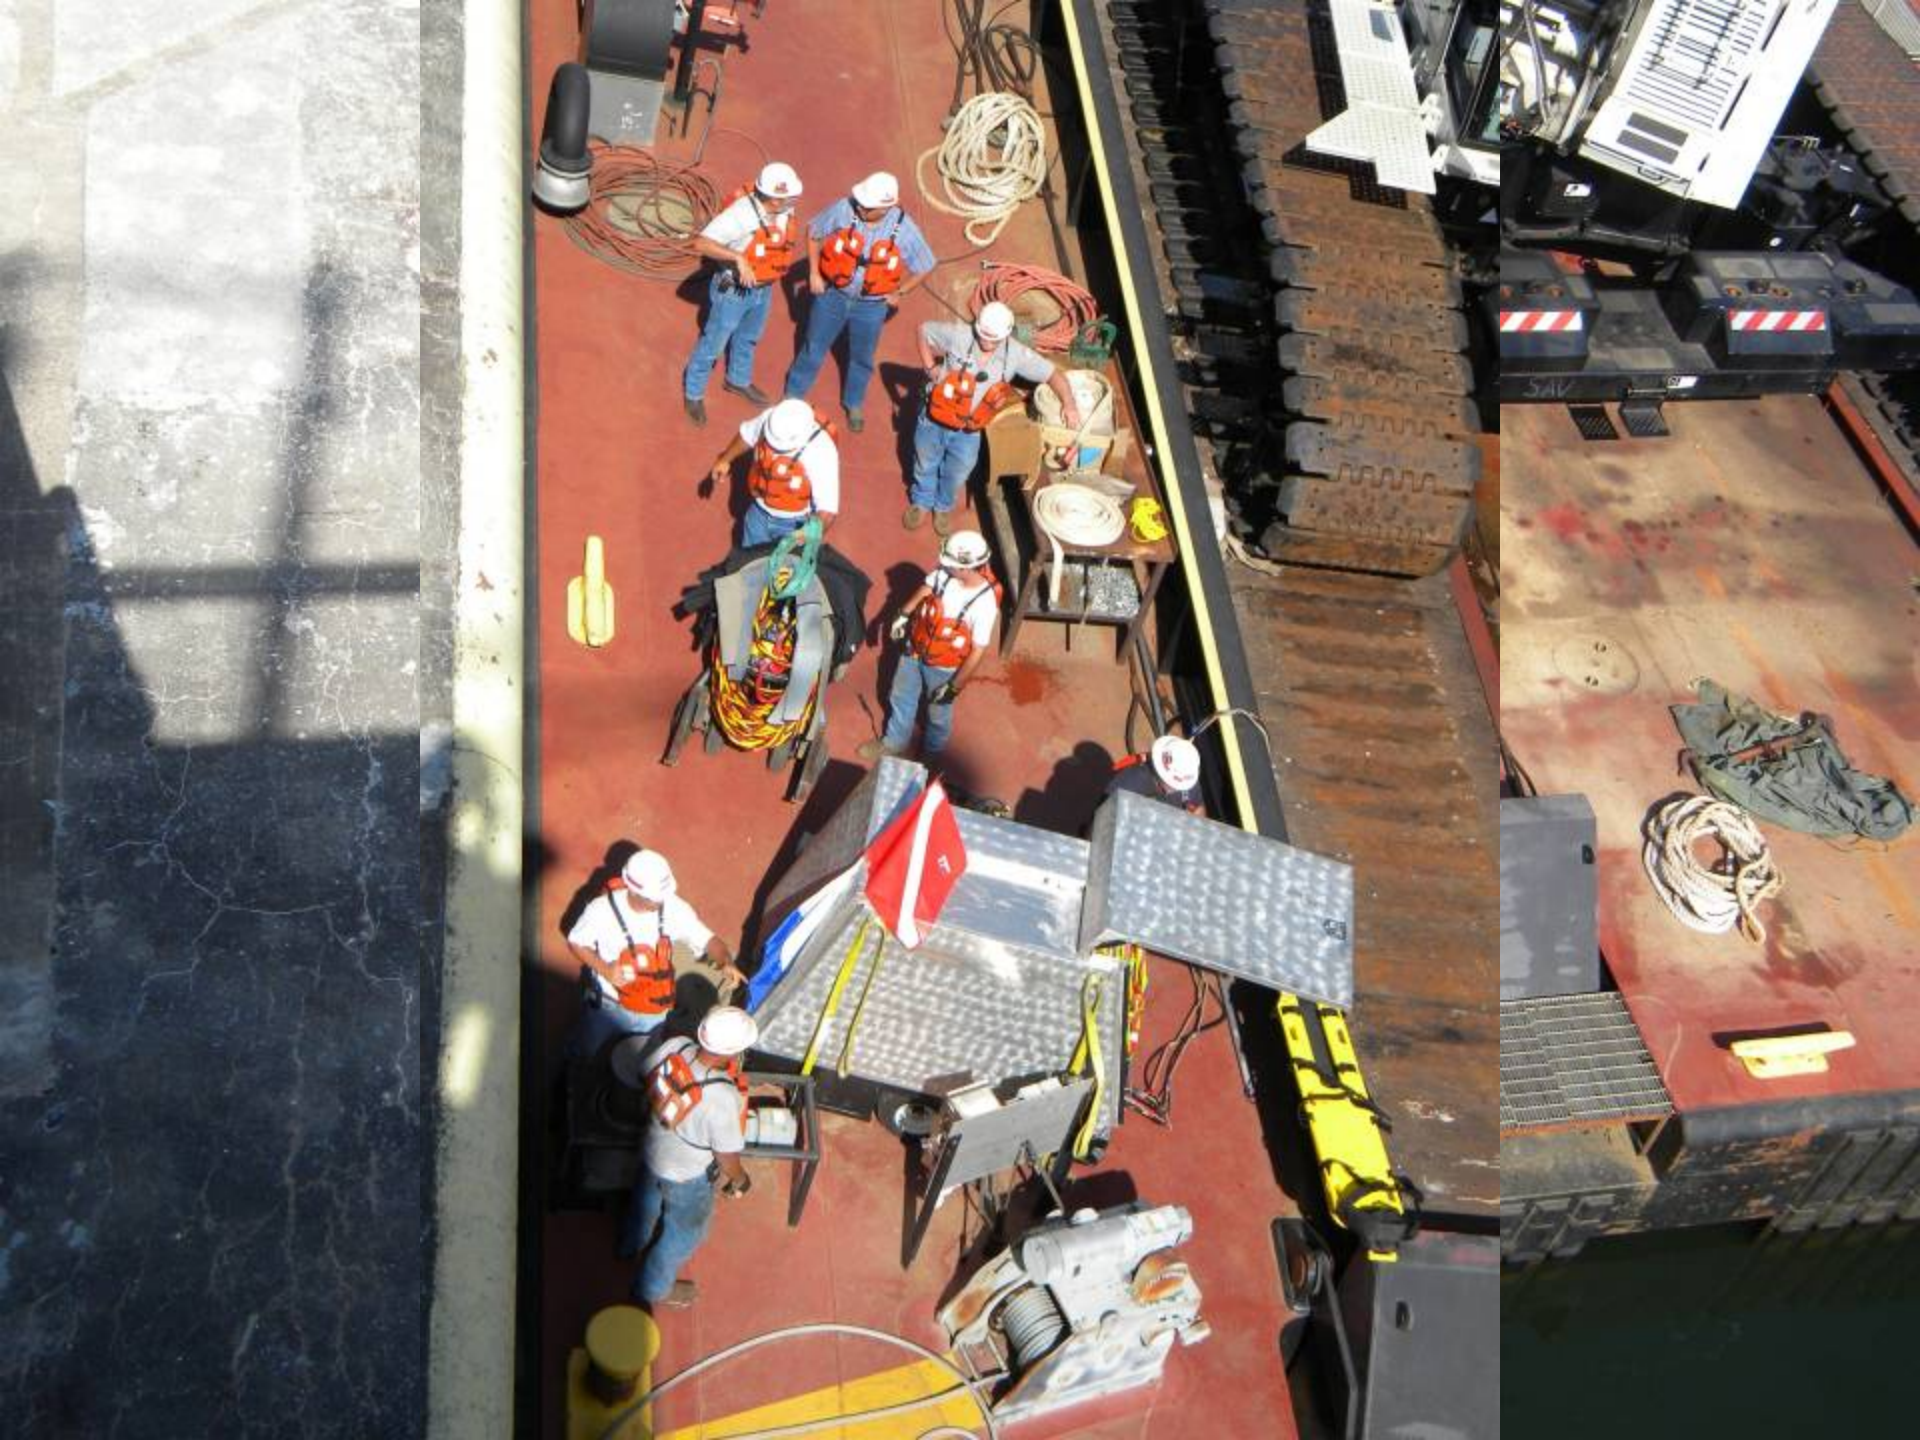

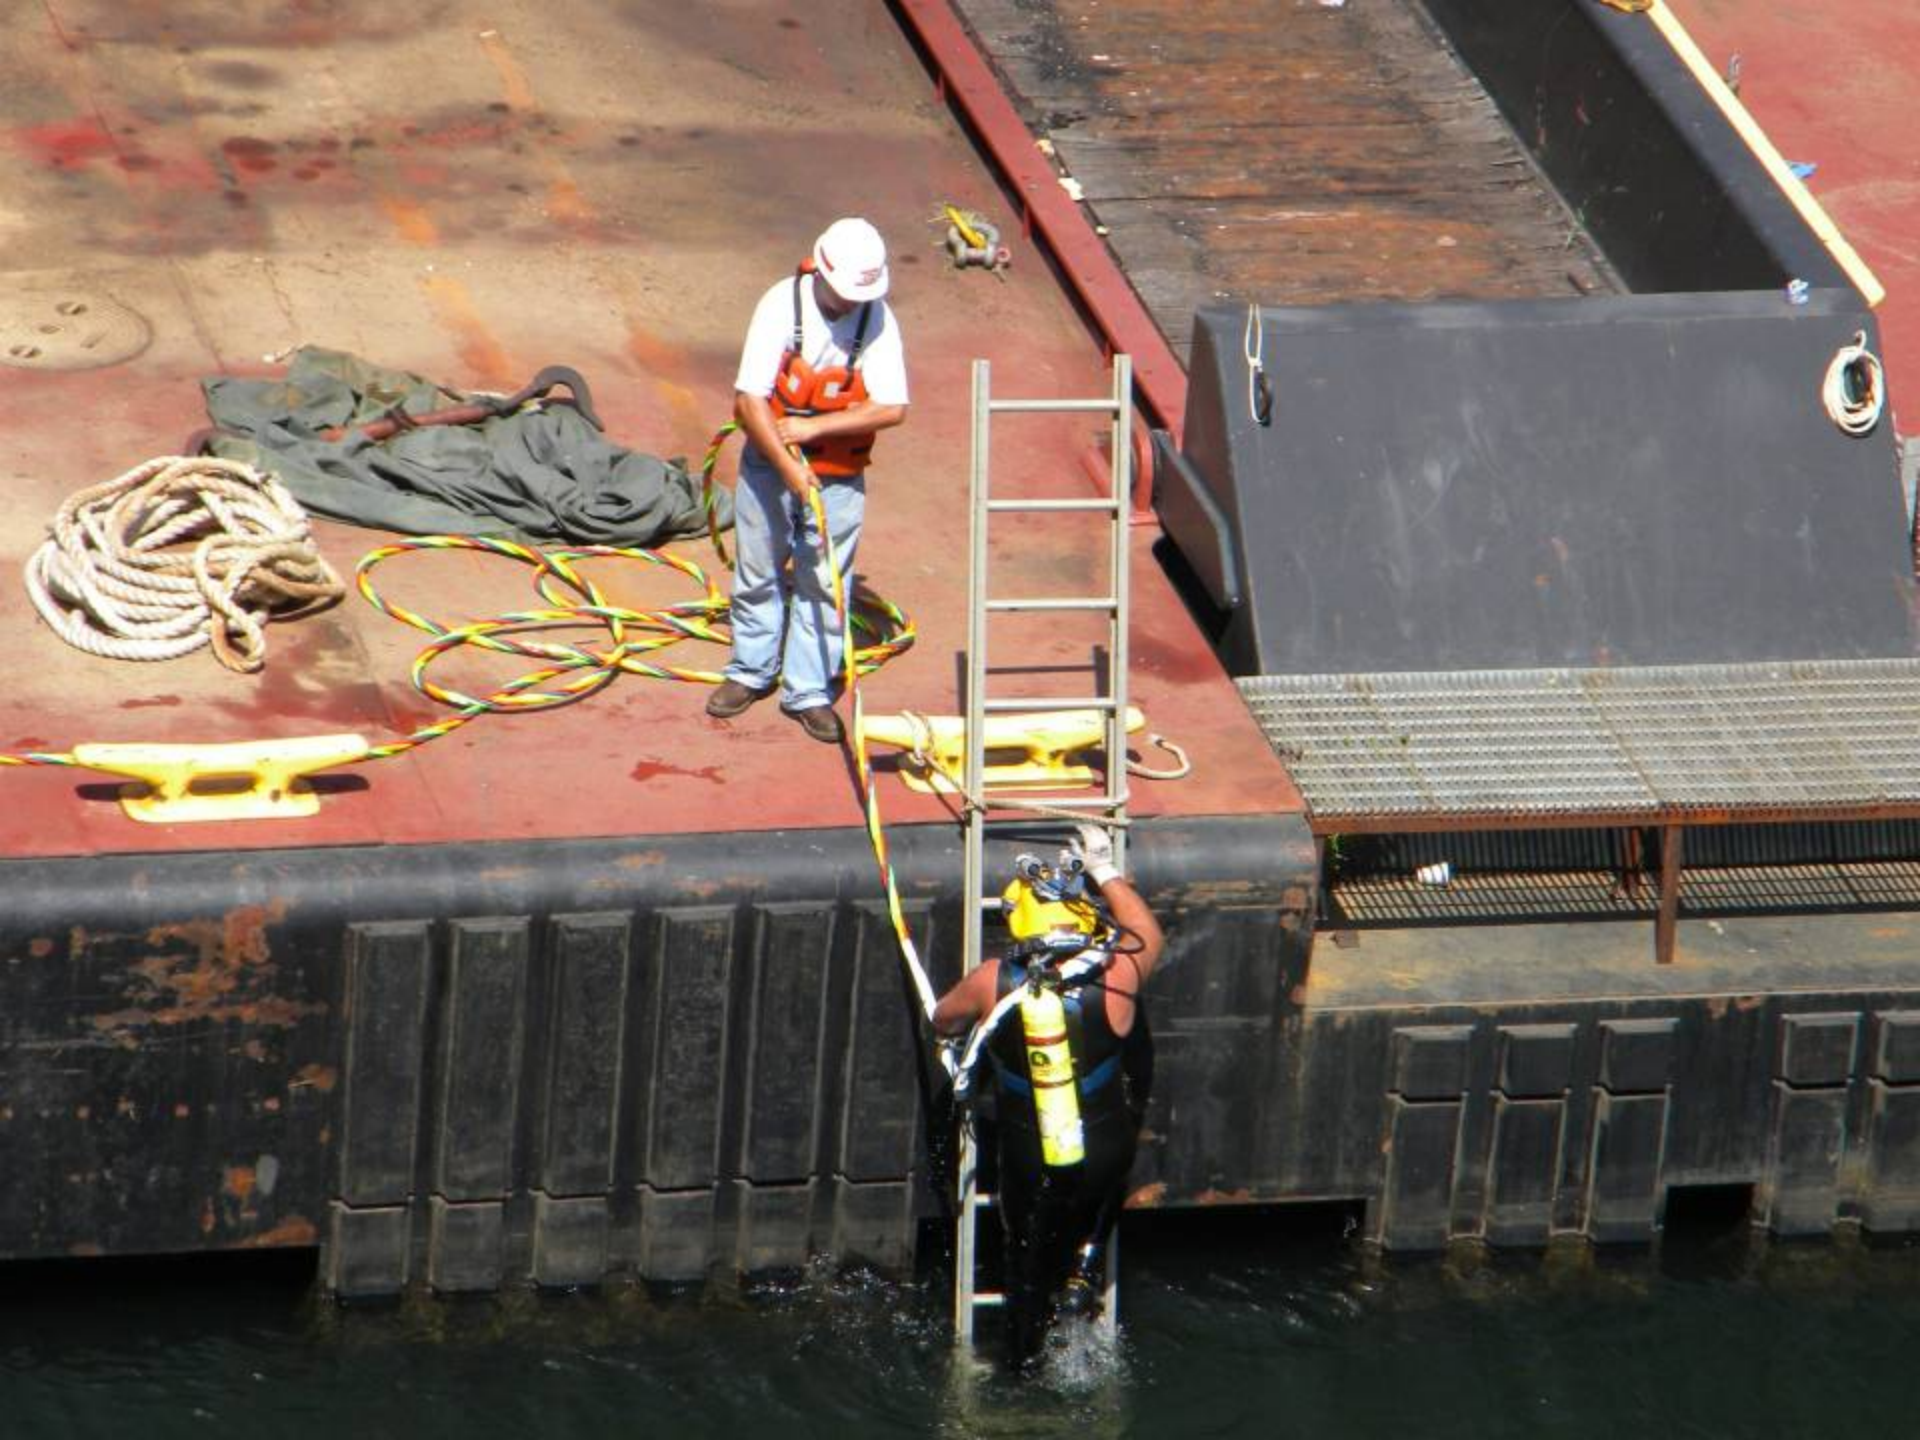

FALL Protection
GEAR

Miter Sill

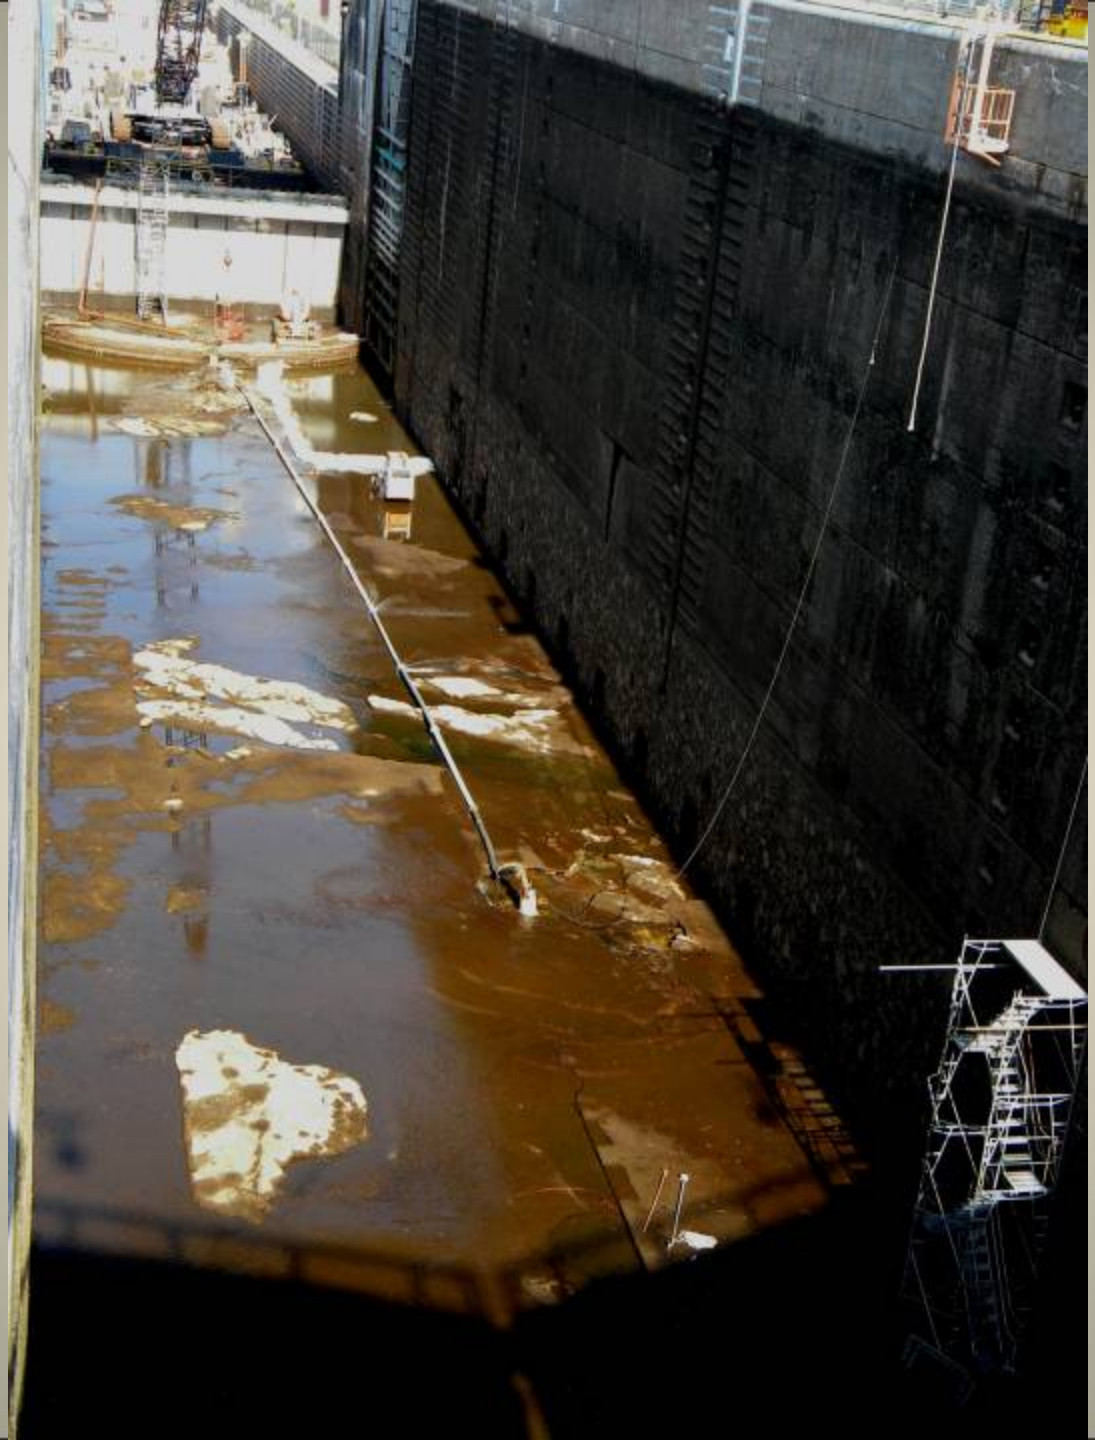

BARTON SOUTHERN COMPANY, INC.
2291 Plunkett Road
Conyers, GA. 30012
Mark Banner
1-770-483-5651
1-800-572-3119

www. Bartonsouthern.com

PRIMERESINS

- PRIME FLEX 900XLV
- SINGLE COMPONENT
- WATER ACTIVATED
- 6OO% EXPANSION

SCOREBOARD
Personnel
Only

GAR-BRO

JLG

NON-SHRINK
NON-METALLIC

UHMW
Valve guides

Fully adjustable

installed with 18 in stainless anchors

NON-SHRINK
NON-METALLIC
NON-SHRINK
NON-METALLIC
FIVE STAR GROUT

MANITOWOC
50

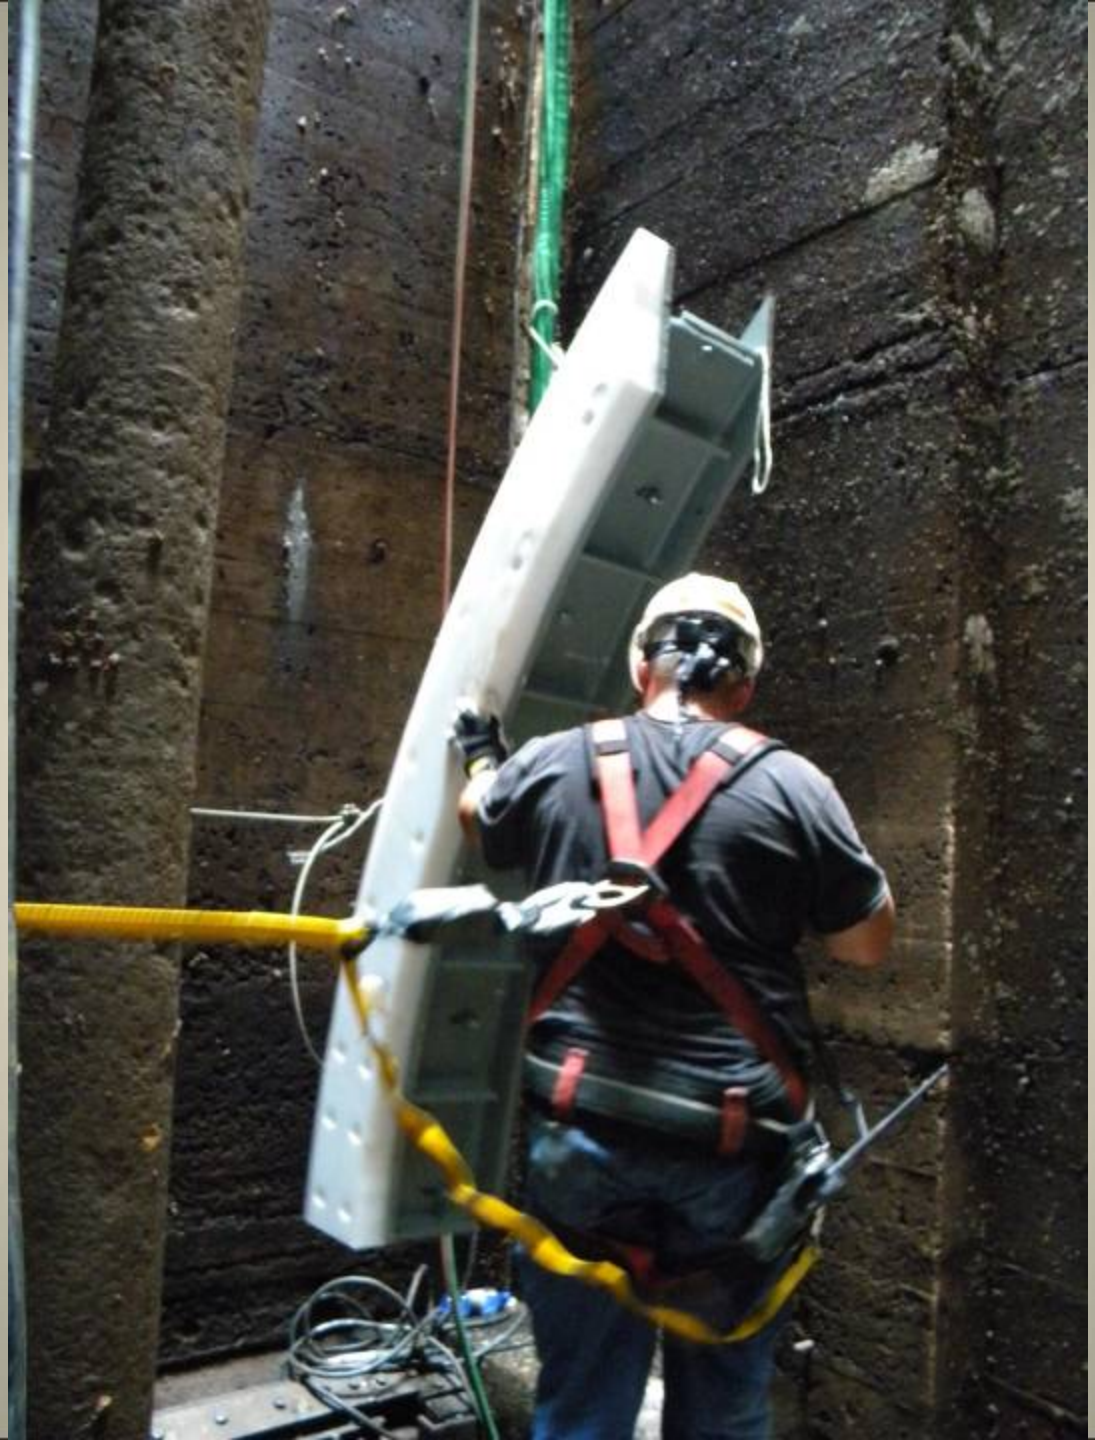

Concrete growth approx 7/8th to 1”

JLG LIFT